


E8 MOVE

Max. working height		7,6 m
Max capacity		200 kg
Number of people		1
Use		Internal
A	Closed machine height	1790 mm
B	Min. height from the ground*	325 mm
C	Maximum platform height	5580 mm
D	Base overall dimensions	1280 mm
E		780 mm
F	Cage dimensions	700 mm
G		780 mm
Machine weight		1020 kg
Power supply		24 V
Batteries		4 Pb Trojan Lead-Acid 6V 245Ah
Battery charger		115V – 230V 50/60HZ
Climbing ability at height		2,5%
H	Maximum climbing ability	15%
Drive wheels dimension		Ø 250 x 76
Swivel wheels dimensions		Ø 200 x 50
Internal turning radius		0
R	External turning radius	1360 mm
Max. speed (rising – descending)		0,2 m/s
Maximum shifting speed		5,5 km/h
Maximum shifting speed at height		1 km/h
I	Maximum pressure for wheel at full load**	4,3 kN
Work cycles (with fresh batteries) ***		100

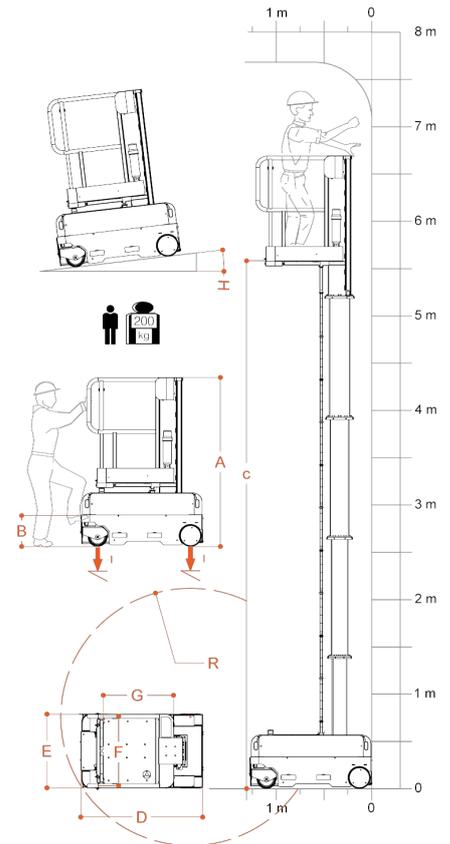

* Intermediate steps are present

** Maximum pressure, considering that the weight of the order picker plus the maximum load on board are fully distributed on one side of the machine (completely asymmetrical load).

*** By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform. The work cycles are indicative and not guaranteed.



Compliant with **EN280** rule.
Approved for indoor use or outdoor use in the absence of wind.

Standard RAL Colors: RAL 2004 Glossy Orange, RAL 7016 Matte Grey