


# ELEVAH® 80-65 MOVE

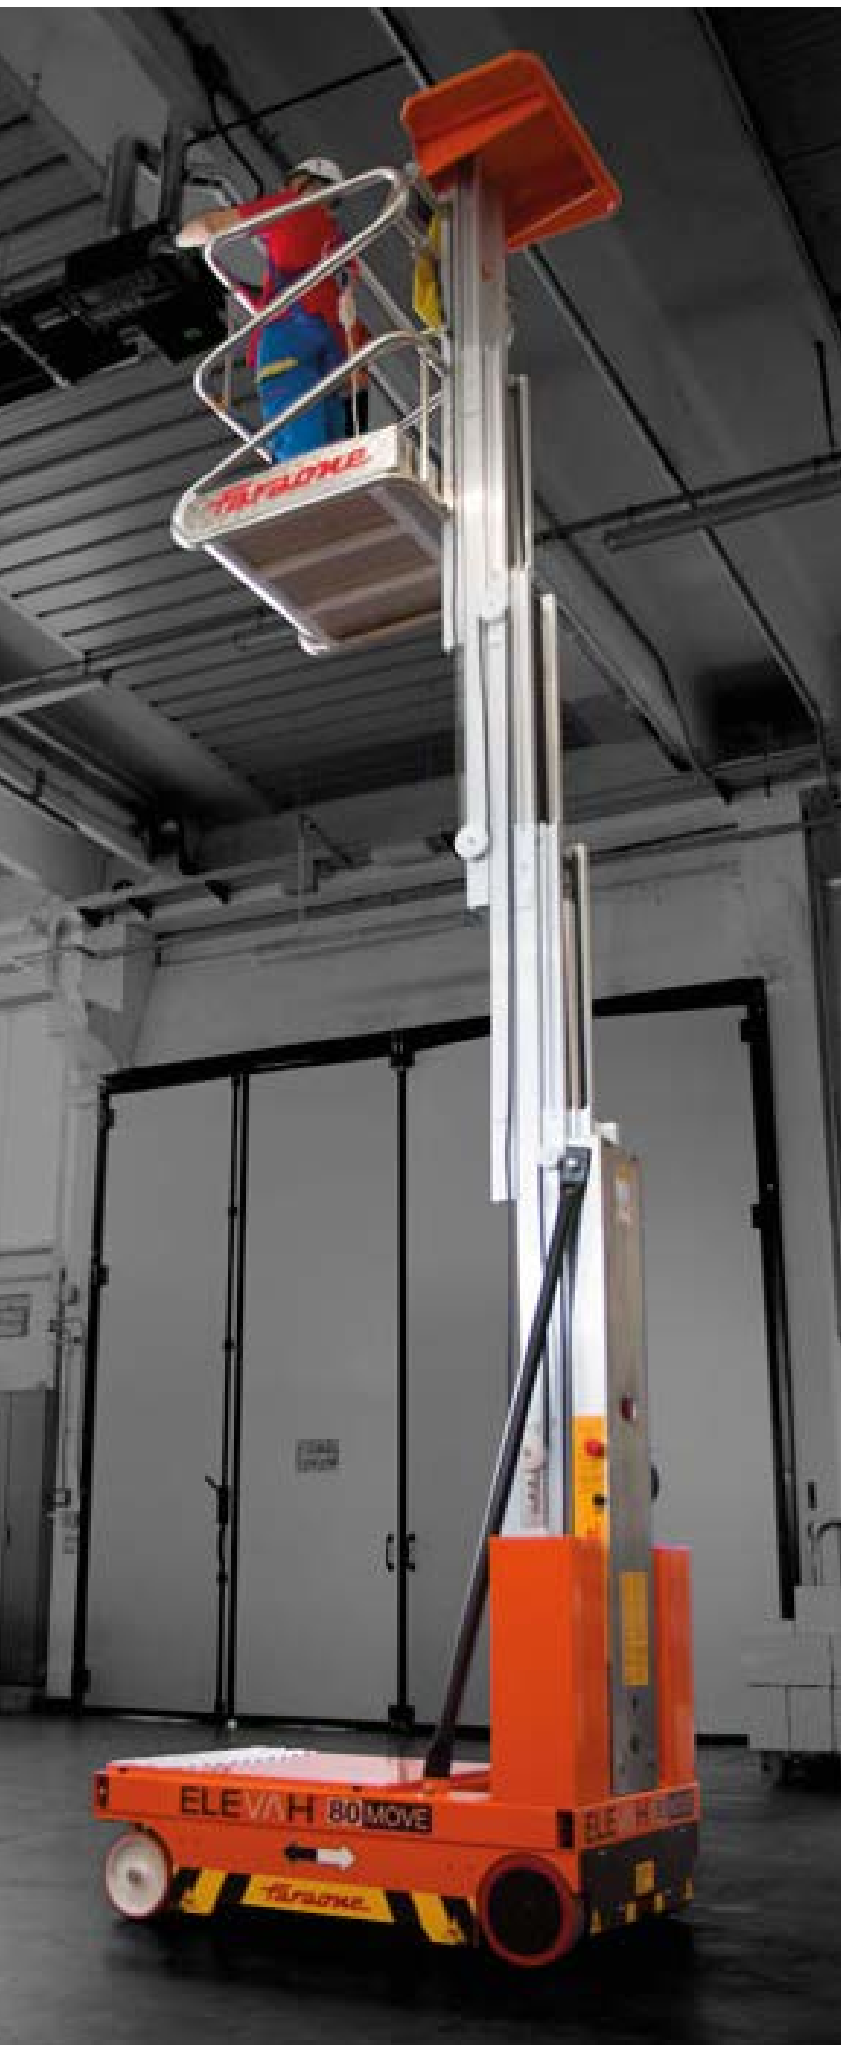

# ELEVΛH® 80-65 MOVE

Max. working height		6,5 m
Max capacity		200 kg
Number of people		1
Use		Internal
A	Closed machine height	1720 mm
B	Minimum platform height	400 mm
C	Maximum platform height	4680 mm
D	Base overall dimensions	1280 mm
E		780 mm
F	Cage dimensions	770 mm
G		790 mm
Machine weight		680 kg
H	Fixed picking tray dimensions	740 mm
I		440 mm
Fixed picking tray capacity		20 kg
Drive wheels dimension		Ø 220 x 65 mm
Swivel wheels dimensions		Ø 200 x 50 mm

## PERFORMANCE

Power supply		24 V
Batteries		Lead-Acid Batteries 12V 105 Ah
Battery charger		110V – 230V 50/60HZ
J	Maximum climbing ability	15 %
Climbing ability at height		2,5 %
Internal turning radius		0
External turning radius		1095 mm
Max. speed (rising – descending)		0,2 m/s
Maximum shifting speed (on the ground - at height)		4 km/h - 1km/h
K	Maximum pressure for wheel at full load*	3,1 kN
Work cycles (with fresh batteries)**		Ca. 130

\* Maximum pressure whereas the weight of the platform plus the maximum load on the basket are completely distributed on one side of the platform (totally asymmetric load).

\*\* By work cycle we mean a self-propelled movement of 20 m with a full ascent to and descent from the maximum height and with adjustment of the loading platform.



Compliant with **EN280** rule.  
Approved for indoor use or outdoor use in the absence of wind.

